

POWERPACK

3300 SERIES

10/15/20 kVA

ONLINE UPS




DATA CENTER

EMERGENCY

MEDICAL

INDUSTRY

TRANSPORT



UPS ONLINE

TOWER

POWER FACTOR

SERVICE

3:3
PHASE



FEATURES


- High Frequency and True Double-Conversion
- DSP (Digital Signal Processors) Technology
- Input Power Factor Correction (PFC)
- Wide Input Voltage Range (110~300V)
- Output Power Factor 0.9
- Cold Start
- Auto Sensing Frequency
- ECO Mode Operation for Energy Saving
- Selectable Output Voltage via LCD
- 50Hz/60Hz Frequency Converter Mode Available
- Selectable Battery Low Voltage via LCD
- Power-On Self Test
- Advanced Battery Management (ABM)
- Short Circuit and Overload Protection
- Automatically Charging Battery at UPS Off Mode
- Fan Speed Auto Control when Load Varies
- Generator Compatible
- Emergency Power Off (EPO)
- Standard RS232 Communication Port
- USB/SNMP Communication Port (Optional)
- Extension Battery Bank (Optional)
- Built-In Isolation Transformer (Optional)
- Manual Bypass (Optional)
- N+X Redundancy Parallel (Optional)

CERTIFICATES



DETAILS

1. RS 485 Port
2. Dry Contact Port (Optional)
3. Parallel Port 1
4. Parallel Port 2
5. USB Port
6. RS232
7. EPO Port
8. Power Switch
9. Input Switch
10. Terminal Block
11. Intelligent Slot 1 (SNMP Card / Relay Card)
12. Intelligent Slot 2 (SNMP Card / Relay Card)
13. Maintenance Switch
14. Output Switch
15. Ground

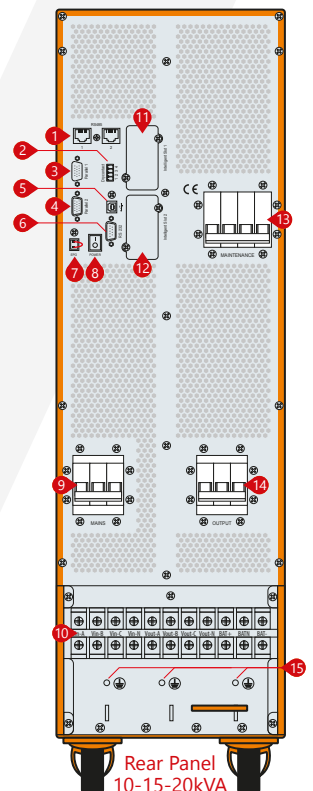

MODEL			
Capacity	10kVA / 9kW	15kVA / 13,5kW	20kVA / 18kW
INPUT			
Related Voltage	380 / 400 / 415 VAC, (3Ph+N+PE) -20% +15%		
Voltage Range	208 - 478 VAC		
Frequency	50 Hz: 45-55 Hz; 60 Hz: 54-66 Hz (Auto Sensing)		
Power Factor	≥0,99		
Bypass Frequency Range	50-60 Hz ±10%		
Harmonic Distortion	≤3% (100% Non-Linear Load)		
ECO Range	Max. Voltage: 220V: +25% (Optional +10%, +15%, +20%), 230V: +20% (Optional +10%, +15%), 240V: +15% (Optional +10%) Min. Voltage: -45% (Optional -20%, -30%)		
Generator	Compatible		
OUTPUT			
Voltage Range	380V / 400V / 415 VAC (3Ph+N+PE)		
Power Factor	0.9		
Voltage Regulation	±1%		
Frequency	AC Mode	±1%, ±2% , ±4%, ±5%, ±10% (Optional)	
	Battery Mode	50-60 ± 0.1 Hz	
Waveform	Pure Sinewave		
Crest Factor	3:1		
Harmonic Distortion	≤2% (Linear Load) ≤5% (Non-Linear Load)		
Transfer Time	Battery Mode to Inverter Mode 0ms, Inverter to Bypass Mode 0ms		
Output Dynamic Tolerance	At 100% Load ±5%		
Overload Capability	AC Mode	≤110%: 60min.; ≤125%: 10min.; ≤150%: 1min. ≥150% turn to Bypass Mode Immediately	
	Battery Mode	>150% Bypass Mode	
Parallel Operation	Optional		
EFFICIENCY			
AC Mode	93,5%		94,5%
Battery Mode	92,5%		93,5%
ECO Mode	98%		
BATTERY			
DC Voltage	Standard Model	±120 VDC	±120 VDC
	Optional	±120 VDC	
Standard Model Inbuilt Battery	40 x 12V 7/9Ah		
Charge Current	Standard Model	1,35 / 2,7 / 4,05A	
	Long Time Model	20A	
Typical Recharge Time	8 hour		
PROTECTION			
Full Protection	Overload, Short Circuit ve Battery Charge-Discharge Protection, RFI/EMI Filtre, IP20		
SYSTEM FEATURES			
Charge Current	Smart Charging System		
Over-temperature	Line Mode: Turn to Bypass; Backup Mode: Shut Down UPS Immediately		
Intelligent Alarm System	Line Failure, Low Battery, Overload, System Failure		
LED&LCD Monitor	Line Mode, Battery Mode, Bypass Mode, Battery Low, Overload & UPS Fault		
ALARM			
Utility Failure	Line Mode, Low Battery, Overload, System Fault		
Battery Low	Alarm and Shut Down		
Overload	Overload		
UPS Fault	System Fault		
ENVIRONMENTAL			
Operation Temperature	0°C~40°C		
Storage Temperature	-25°C~55°C		
Humidity	0%~90%		
Altitude	<1500 m		
Noise Level	<50 dB		
COMMUNICATION			
Communication Interface	USB, RS232, RS485, Parallel Port, Dry Contact, Smart Port, SNMP Card (Optional), Relay Card (Optional)		
Software	Muser4000, Sofaware		
Emergency Power Off	Dry Contact (Optional)		
STANDARDS			
Safety	IEC/EN62040-1, IEC/EN60950-1		
EMC	IEC/EN62040-2, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8		
DIMENSIONS & WEIGHT			
Dimensions WxDxH (mm)	828 x 250 x 868		
Packaging Dimensions WxDxH (mm)	935 x 365 x 1055		
Net Weight (kg)	115	170	171
Gross Weight (kg)	143	198	199

Makelsan reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Makelsan products previously or subsequently sold. Makelsan does not guarantee the items of the accuracy and completeness.